


819.00 EUR

incl. 19% VAT, plus [shipping](#)

- BayTrail-D J1900 !
- 4GB RAM !
- IP65 !
- 9-28V DC !

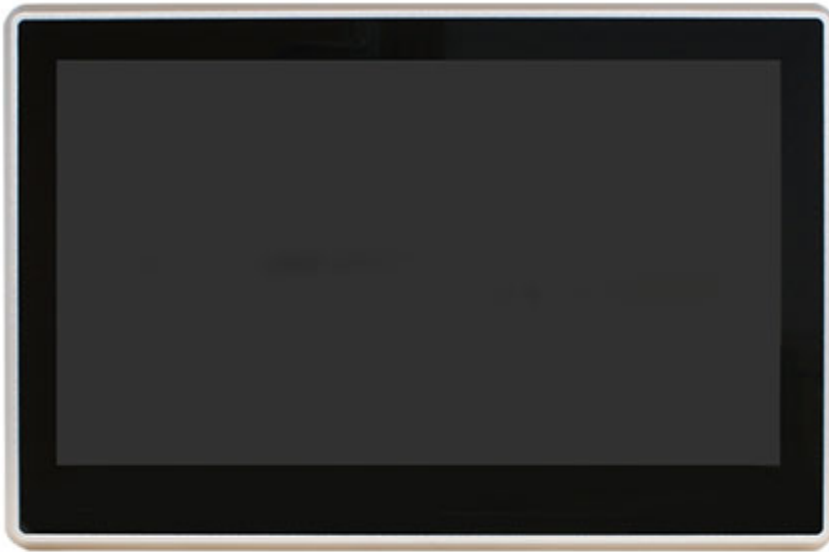

- 13.4" 220 nits high brightness TFT LCD with LED backlight
- 10-points Multi Capacitive Touch
- Intel® Bay Trail-D J1900 2.0GHz/QC processor
- Onboard DDR3L 1333MHz DRAM 4GB
- 2\* GbE, 2\* RS232/422/485, 2\* RS232, 2\* USB3.0, 2\* USB2.0, 1\* VGA
- 1\* Mini PCIe, 1\* M.2 M-key (2242/2260/2280, SATA interface)
- 9~28V DC-in
- Front bezel meets IP65-rated protection

Display	<ul style="list-style-type: none"> <li>- IP65, NEMA 4 rugged protection, Full planar metal border</li> <li>- 13.4" With LED Backlight</li> <li>- 220 nits Brightness (cd/m<sup>2</sup>)</li> <li>- 262K display color</li> <li>- 1366 x 768 @ 60Hz resolution</li> <li>- 90°/65° viewing angle (H/V)</li> <li>- 0.17925 x 0.17925 mm pixel pitch</li> <li>- 16:9 aspect ratio</li> <li>- 500:1 contrast ratio</li> <li>- 11ms response time</li> </ul>
Touch Screen	<ul style="list-style-type: none"> <li>- Projected capacitive type</li> <li>- 340.00 x 200.00mm ±0.3mm active range</li> <li>- Transparency ■ 85%</li> <li>- Surface Hardness ■ 6H (JIS-5400)</li> <li>- Glass haze value ■ 3%</li> </ul>
Case	<ul style="list-style-type: none"> <li>- Aluminum panel</li> <li>- Iron case</li> <li>- Silver + Black color</li> <li>- Spray paint coating requirement</li> </ul>
Main System	<ul style="list-style-type: none"> <li>- Intel® Bay Trail-D J1900 2.0GHz/QC processor</li> <li>- Onboard DDR3L 1333MHz DRAM 4GB</li> <li>- 64MB SPI Flash ROM BIOS</li> <li>- Watchdog Timer: 256 levels, 0~255 sec.</li> <li>- OS Support: Windows 7 / 8.1 / 10 / Linux (Option)</li> </ul>
Expansion	<ul style="list-style-type: none"> <li>- 1* Mini PCIe for WIFI or 3G/4G</li> </ul>
Storage	<ul style="list-style-type: none"> <li>- 1* SATA</li> <li>- 1* M.2 M-key (2242/2260/2280, SATA Interface)</li> </ul>
I/O Connector	<ul style="list-style-type: none"> <li>- 2* USB3.0</li> <li>- 2* USB2.0</li> <li>- 2* RS232/422/485</li> <li>- 2* RS232</li> <li>- 1* VGA</li> <li>- 2* RJ45 (Intel I211AT GbE)</li> <li>- 1* Lockable 9~28V DC jack</li> <li>- 1* Power button</li> </ul>
Power Input	<ul style="list-style-type: none"> <li>- 9~28V DC-in</li> <li>- AC version: 100~240V AC-DC 60W power adapter or</li> <li>- DC version: 12VDC with over current protection fuse</li> </ul>
Power Consumption	<ul style="list-style-type: none"> <li>- 20W</li> </ul>
Dimensions	<ul style="list-style-type: none"> <li>- 347.42 * 228.00 * 56.60mm</li> </ul>
Compliance	<ul style="list-style-type: none"> <li>- CE, FCC, IP65 (Front)</li> </ul>
Safety	<ul style="list-style-type: none"> <li>- Shock: 15G, 11ms duration</li> <li>- Vibration: 5~500Hz/1 Grms</li> </ul>
Temperature	<ul style="list-style-type: none"> <li>- Operating: : -10°C ~ 60°C (with W.T. DRAM/HDD in airflow condition)</li> <li>- Operating: : -10°C ~ 60°C (with W.T. DRAM/HDD)</li> <li>- Storage: -20°C ~ 85°C</li> </ul>