


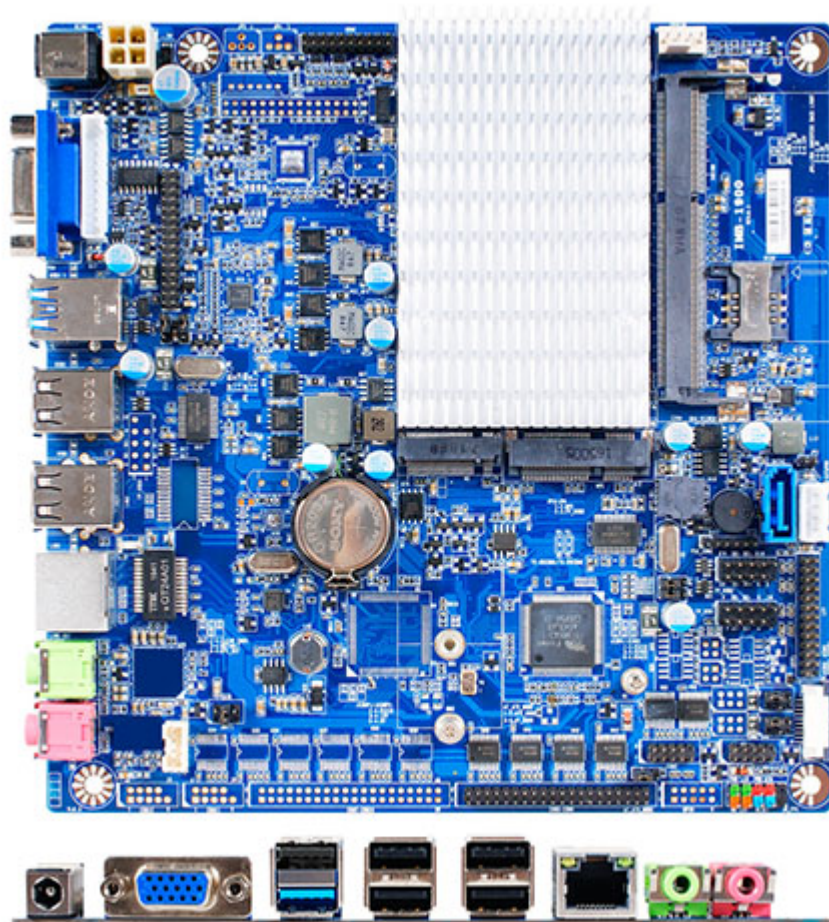

249.00 EUR

incl. 19% VAT, plus [shipping](#)

- J1900 ! JIMB-1900-6C !
- 6x USB !
- Power Onbaord !
- Thin miniITX !

Support:  [Datasheet](#)

- Intel® Quad Core J1900 processor
- ONE 204-pin SO-DIMM up to 8GB DDR3L 1333 MHz SDRAM
- Support 1* VGA, 1* HDMI
- Support 1* Mini PCIe
- 1* USB3.0, 9* USB2.0, 6* COM
- Thin Mini ITX Form Factor

Chipset	– INTEL® Celeron™ J1900 (2.0 GHz) quad-core processor – 2 Phase CPU Power Support
I.O Chipset	– FINTEK F81866AD-I
Memory	– 1*SO-DIMM slot – Support DDR3L 1333 – Max. capacity of system memory up to 8GB
Expansion Slots	– 1* Mini PCI-E connector
Storage	– 1* Serial ATA2 3Gb/s connector – 1* M.2 Connector(2242/2260)
Ethernet LAN	– REALTEK® RTL8111G Chip – 1* PCI Express Gigabit LAN
EDP	– 1*EDP
USB	– 1* USB3.0 Port – 9* USB 2.0(5 distribute in back panel, 4 distribute in mid-board)

Special Features	– Support CPU Smart Fan – Support Watch dog Technology – Support VGA header – Support HDMI header – Support Power On board – Support 2* RS422/RS485/RS232 COM ports – COM1/COM2 Support TTL – Thunder Protection Function – All Solid Capacitor design – All Power Pack MOSFET design
Back Panel I/O	– 1* USB3.0 port – 5* USB 2.0 ports – 1* RJ-45 ports – 1* Line-out connector & 1* MIC (No function) – 1* VGA port (Max. Resolution: 1920*1200@60Hz) – 1* 12V DC in
Internal I/O	– 2* USB 2.0 headers for 4 USB 2.0 ports – 1* CPU / Chassis Fan connectors – 6* COM headers – 1* Parallel header – 1* PS2/KB header – 1* 4-pin ATX 12V Power connector – 1* 4-pin SATA Power connector – 1* 15-pin VGA header (Max. Resolution: 1920*1200@60Hz) – 1* 20-pin HDMI header (Max. Resolution: 1920*1200@60Hz) – 1* eDP header (Max. Resolution: 2560*1600@60Hz) – 1* Mini PCI-e connector – 1* M.2 Connector(2242/2260) – 1* SATA Connector – 1* Speaker header (No function) – 1* Front panel header – 1* SIM Card socket
BIOS	– AMI 64MB SPI ROM
Temperature	– Operating: 0°C ~ 60°C – Storage: -20°C ~ 85°C
Form Factor	– Thin mini ITX Form Factor (170mm X 170mm)